

EPISTAR

OSRAM

CE

LED ВЛАГОЗАЩИТЕНО ИНДУСТРИАЛНО ТЯЛО / LITE 60 600mm 20W


КОД: 650620DZEMXX ('XX' служи за индикация на цветна температура (CCT) 50=5000K)

WATERPROOF



5 ГОДИНИ
ГАРАНЦИЯ

gamma angles

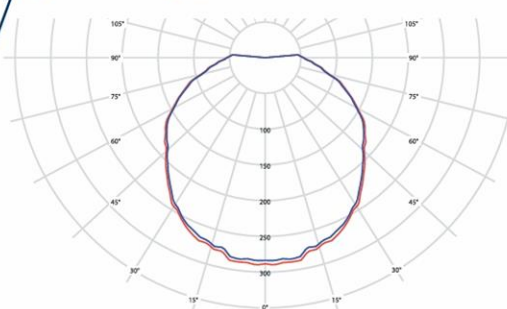

cd/klm

— C0 - C180

— C90 - C270

$\eta = 100\%$

IP RATE
IP65

220V
240V

MOUNT
HOUSE

CRI
>80

120°

SMD
5730

LIFE SPAN
80000
HOURS

GROUND

Технически показатели

Размер	SMD тип	Захранване	Захр. напрежение	Мощност	Цветна темп. CCT	IP защита	Свет. поток	CRI
600mm	5730	Osram	220-240V	20W	3000K/4000K/ 5000K/6500K	IP65	2 720lm	CRI >80

Разсейвател	Ъгъл на изл.	Tc=C°	Стандарти	Апликация	PF	Аварийен блок	Живот	Гаранция
PC/Опал	120°	-20°/+45°	ROHS / CE	ОТКРИТО/ ЗАКРИТО	PF>0.95	3h 5W	80.000h	2г. за аварийен блок и 5г. за осветител



METAL SHEET

- DKP Metal Sheet
- White Paint
- 0,40 mm Thickness



CABLE GLAND

- Raw material : Polyamide
- Protection class: IP 65
- Heat Resistance : - 30 °C + 80 °C



CEILING CARRIER

- Stainless Steel
- Easy and practical installation with biasing Feature
- 0,60 mm Thickness



MANDAL

- Stainless Steel
- Easy and practical installation with biasing Feature
- 0,50 mm Thickness



DRIVER


- Suitable for CE and ROHS Criterias
- High Efficiency >90
- Harmonic Filter
- Lasts for 50.000 Hr





CABLE

- 0,80mm Thickness
- Electrolytic Solid Copper
- Tl/PVC Isolation


ФОТОМЕТРИЧНИ ПОКАЗАТЕЛИ

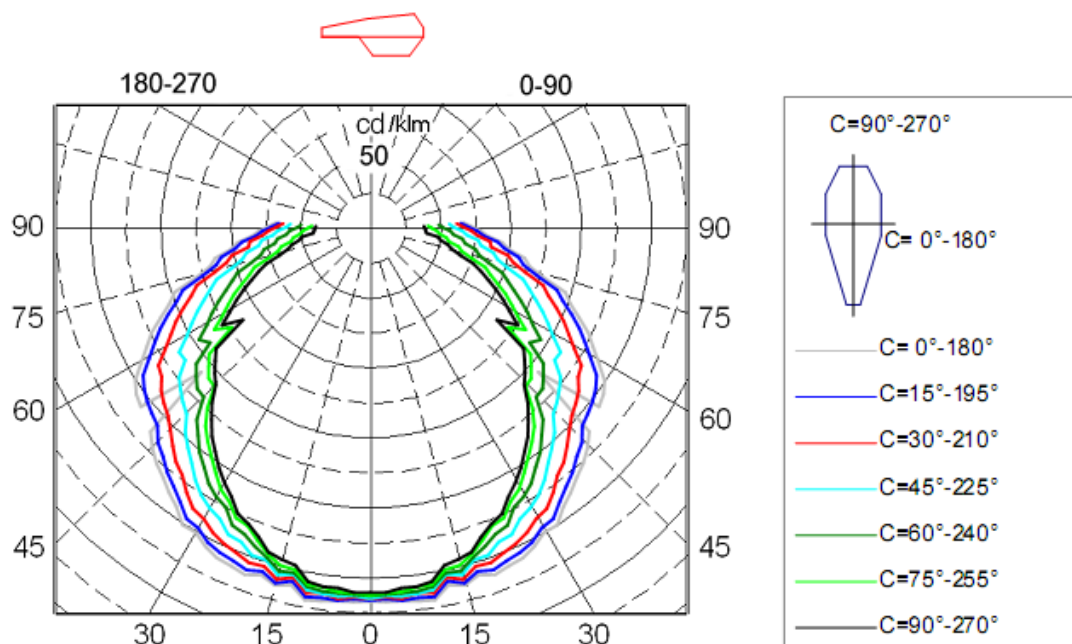

Светлоразпределение при условен светлинен поток 1000lm

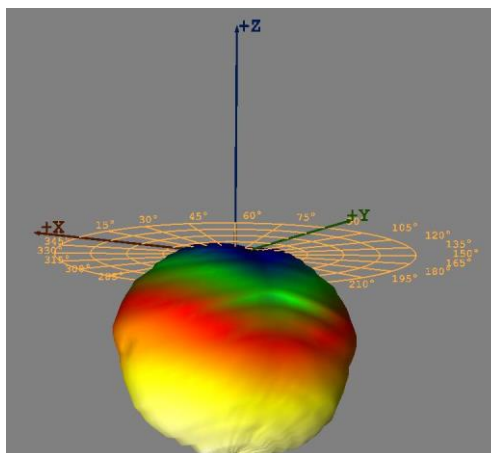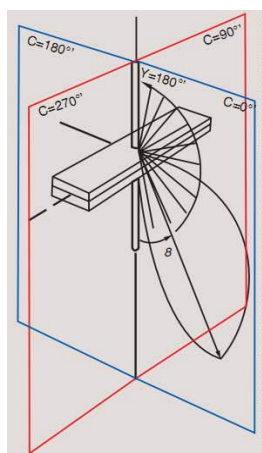

3D разпределение на светлинен поток

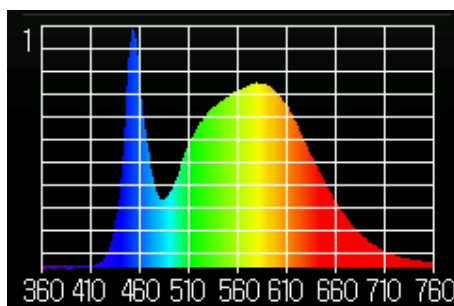

Спектър на светлинен поток 5000K