Technical Datasheet

EPISTAR OSRAM CE

LED STREET LIGHT INDUSTRIAL FIXTURE / SLPPRO 120 665x275x90mm 80W

CODE: 6780SLPAXX ('XX' stand for CCT option 50=5000K)

Electrical specification

Size	Light Source	Driver	Voltage	Power	CCT	IP Level	Lumens	CRI
665x275 x90mm	3030	Osram	220-240V	80W	3000K/4000K/ 5000K/6500K	IP67	11 600lm	CRI>80

Diffuser	Angle	Tc=C°	Certificates	Application	PF	Directive	Lifespan	Warranty
Glass/Lens	143°	-20°/+45°	ROHS / CE	OUTDOOR	PF>0.96	LVD	80.000h	5 years

DRIVER

- Suitable for CE and ROHS Criterias
- High Efficiency >%90
- Harmonic Filter
- Lasts for 50.000 Hr

CABLE

- 0,80mm Thickness
- Electrolytic Solid Copper
- T1/PVC Isolation

Technical Datasheet

Test Reports

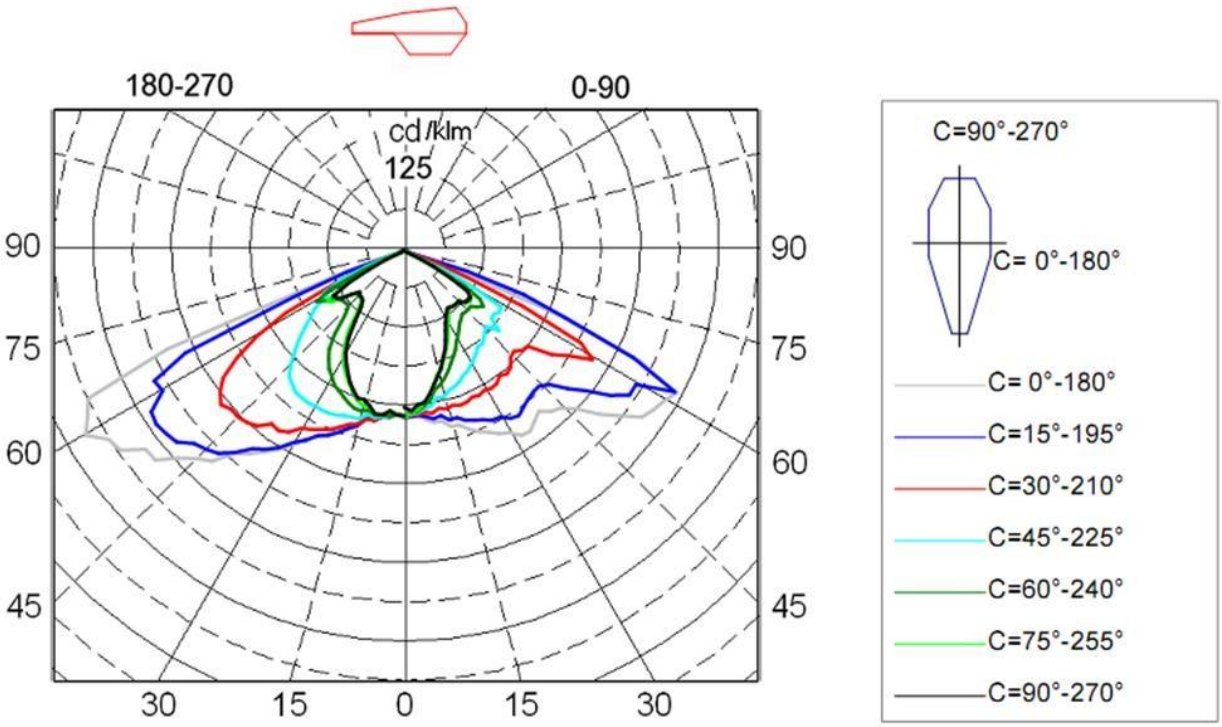

Luminaire light distribution of polar coordinates in the conditional flux 1000lm

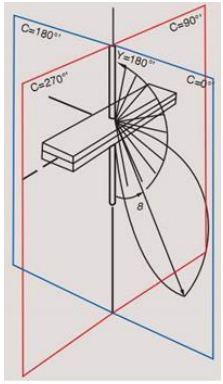

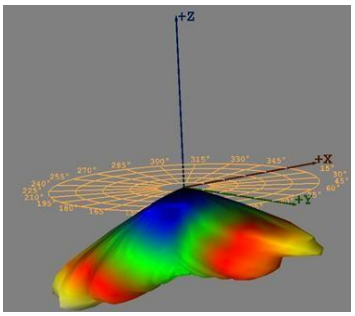

Luminaire light distribution of the 3D

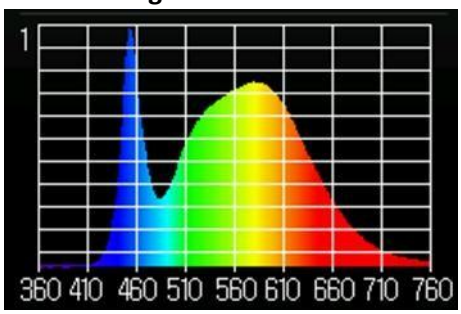

Spectrum of light 5000K