

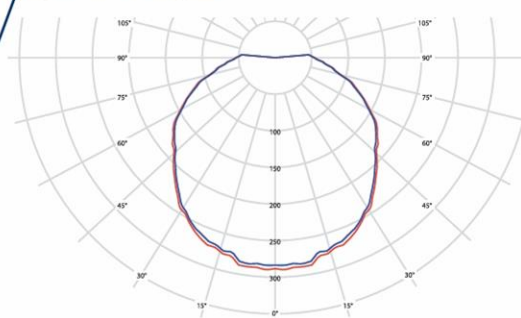
EPISTAR
OSRAM
CE
LED TRIPROOF INDUSTRIAL FIXTURE / LITE 150 1500mm 40W

CODE: 651540DZXX ('XX' stand for CCT option 50=5000K)

WATERPROOF

5 YEARS
WARRANTY

gamma angles


cd/klm

C0 - C180

C90 - C270

 $\eta = 100\%$

IP RATE / 220V / MOUNT / CRI / 120° / SMD / LIFE SPAN / GROUND
IP65 / 240V / / >80 / / 5730 / 80000 /

Electrical Specification

Size	SMD	Driver	Voltage	Power	CCT	IP Level	Lumens	CRI
1500mm	5730	Osram	220-240V	40W	3000K/4000K/ 5000K/6500K	IP65	5 920lm	CRI >80

Diffuser	Angle	Tc=C°	Certificates	Application	PF	Directive	Lifespan	Warranty
PC/Opal	120°	-20°/+45°	ROHS / CE	OUTDOOR/ INDOOR	PF>0.95	LVD	80.000h	5 years


METAL SHEET

- DKP Metal Sheet
- White Paint
- 0,40 mm Thickness


CABLE GLAND

- Raw material : Polyamide
- Protection class: IP 65
- Heat Resistance : - 30 °C + 80 °C


CEILING CARRIER

- Stainless Steel
- Easy and practical installation with biasing Feature
- 0,60 mm Thickness


MANDAL

- Stainless Steel
- Easy and practical installation with biasing Feature
- 0,50 mm Thickness

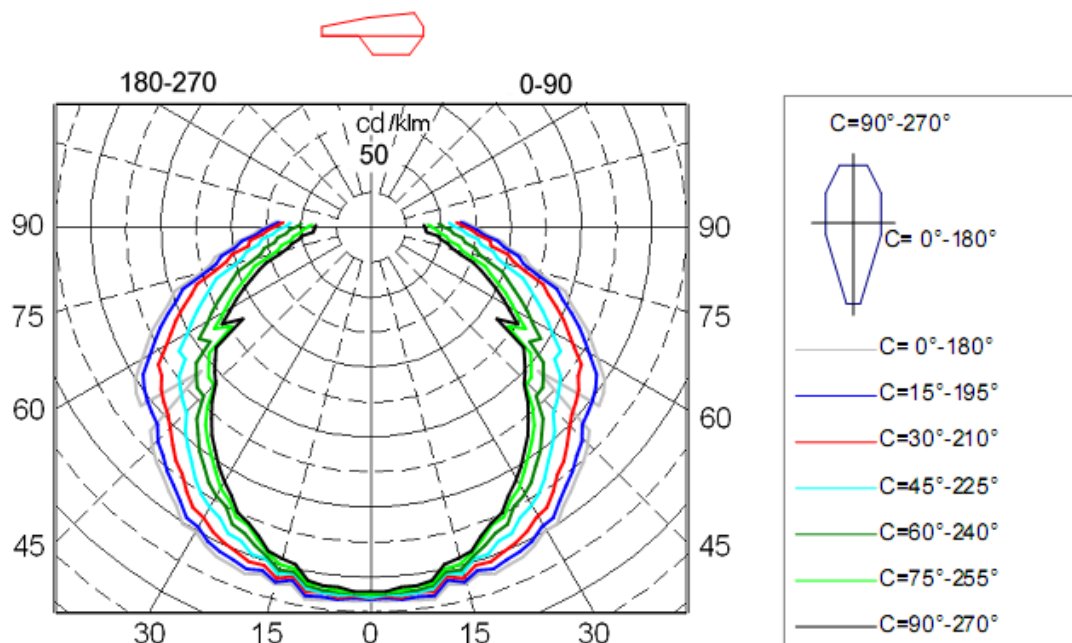

DRIVER

- Suitable for CE and ROHS
- Criterias
- High Efficiency >90
- Harmonic Filter
- Lasts for 50.000 Hr

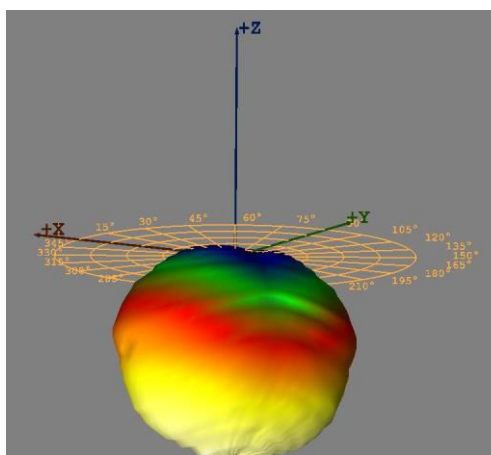
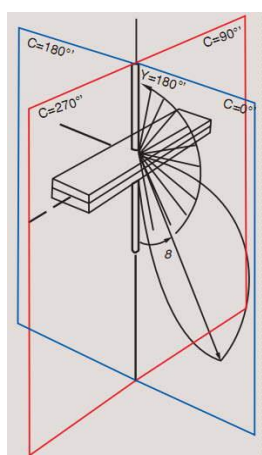

CABLE

- 0,80mm Thickness
- Electrolytic Solid Copper
- T1/PVC Isolation

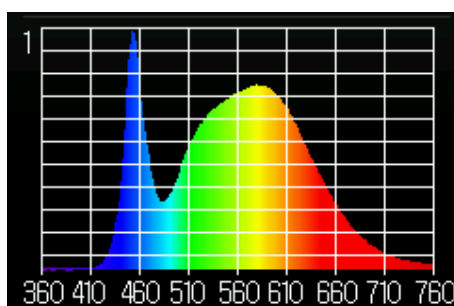
Test Reports



Luminaire light distribution of polar coordinates in the conditional flux 1000lm



Luminaire light distribution of the 3D



Spectrum of light 5000K