

LED TRIPROOF INDUSTRIAL FIXTURE / LITE 120 1200mm 36W

CODE: 651236EDZXX ('XX' stand for CCT option 50=5000K)

WATERPROOF
3 YEARS
WARRANTY

gamma angles

cd/klm

C0 - C180

C90 - C270

 $\eta = 100\%$

IP RATE / $\frac{220V}{240V}$ / MOUNT / CRI / 120° / SMD / LIFE SPAN / GROUND

IP65 / $\frac{220V}{240V}$ /  / >80 /  / 2835 / 50000 HOURS / 

Electrical Specification

Size	Light Source	Driver	Voltage	Power	CCT	IP Level	Lumens	CRI
1200mm	2835	Osram	220-240V	36W	3000K/4000K/ 5000K/6500K	IP65	5 040lm	CRI >80

Diffuser	Angle	Tc=°	Certificates	Application	PF	Directive	Lifespan	Warranty
PC/Opal	120°	-20°/+45°	ROHS / CE	OUTDOOR/ INDOOR	PF>0.95	LVD	50.000h	3 years



METAL SHEET

- DKP Metal Sheet
- White Paint
- 0,40 mm Thickness



CABLE GLAND

- Raw material : Polyamide
- Protection class: IP 65
- Heat Resistance : - 30 °C + 80 °C



CEILING CARRIER

- Stainless Steel
- Easy and practical installation with biasing Feature
- 0,60 mm Thickness



MANDAL

- Stainless Steel
- Easy and practical installation with biasing Feature
- 0,50 mm Thickness



DRIVER


- Suitable for CE and ROHS
- Criteria
- High Efficiency >90
- Harmonic Filter
- Lasts for 50.000 Hr





CABLE

- 0,80mm Thickness
- Electrolytic Solid Copper
- Tl/PVC Isolation


Test Reports

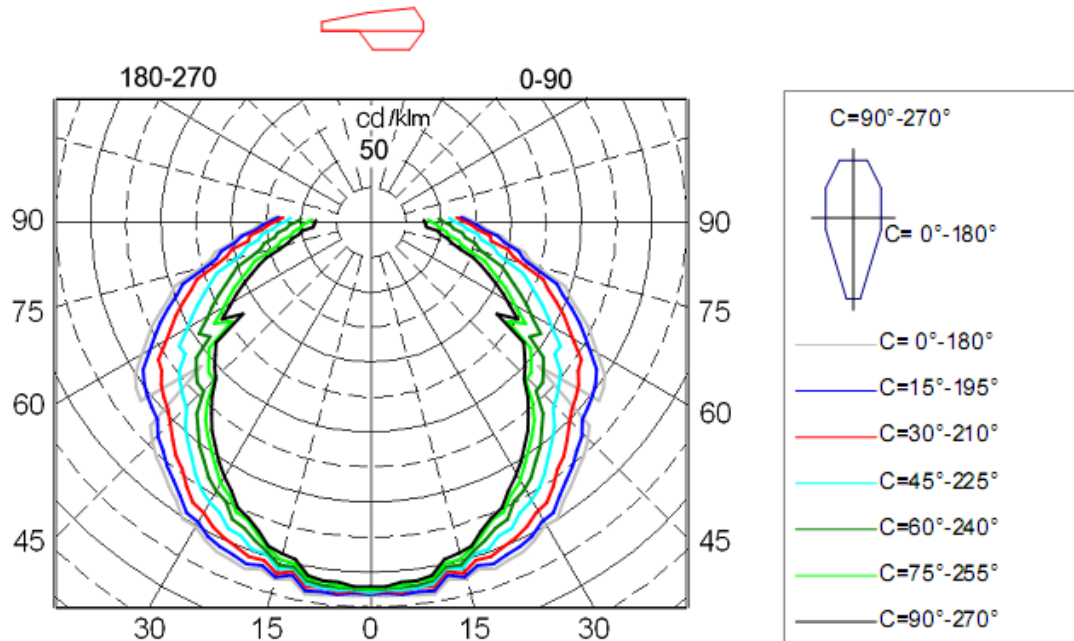

Luminaire light distribution of polar coordinates in the conditional flux 1000lm

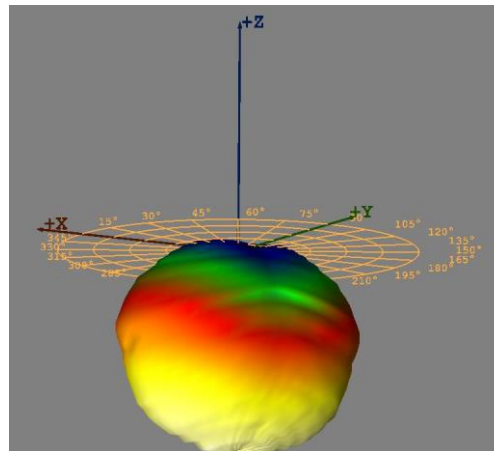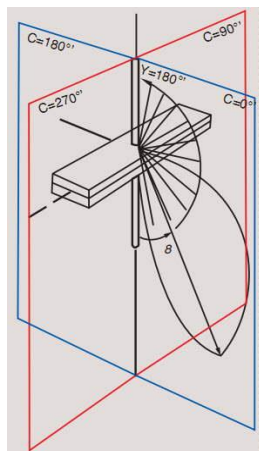

Luminaire light distribution of the 3D

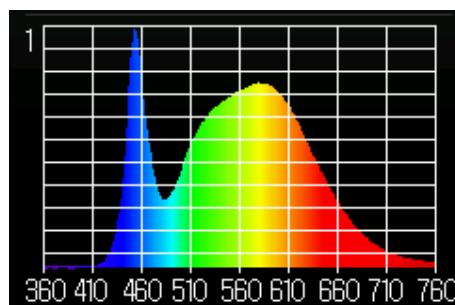

Spectrum of light 5000K