EPISTAR OSRAM CE

LED PANEL LIGHT FIXTURE / LP600 600x600x70mm 42W

CODE: LP642EMXX ('XX' stand for CCT option 50=5000K)

Electrical Specification

Size	Light Source	Driver	Voltage	Power	CCT	IP Level	Lumens	CRI
600x600x70 mm	5730	Osram	220-240V	42W	3000K/4000K/ 5000K/6500K	IP20	5 292lm	CRI >80

Diffuser	Angle	Tc=C°	Certificates	Application	PF	Emergency Power	Lifespan	Warranty
PS/Opal	120°	-20°/+45°	ROHS / CE	INDOOR	PF>0.95	3h 5W	50.000h	2y. for emergency unit 6y. for luminaire

DRIVER
- Suitable for CE and ROHS Criterias
- High Efficiency >%90
- Harmonic Filter
- Lasts for 50.000 Hr

CABLE
- 0,80mm Thickness
- Electrolytic Solid Copper
- T1/PVC Isolation

Test Reports

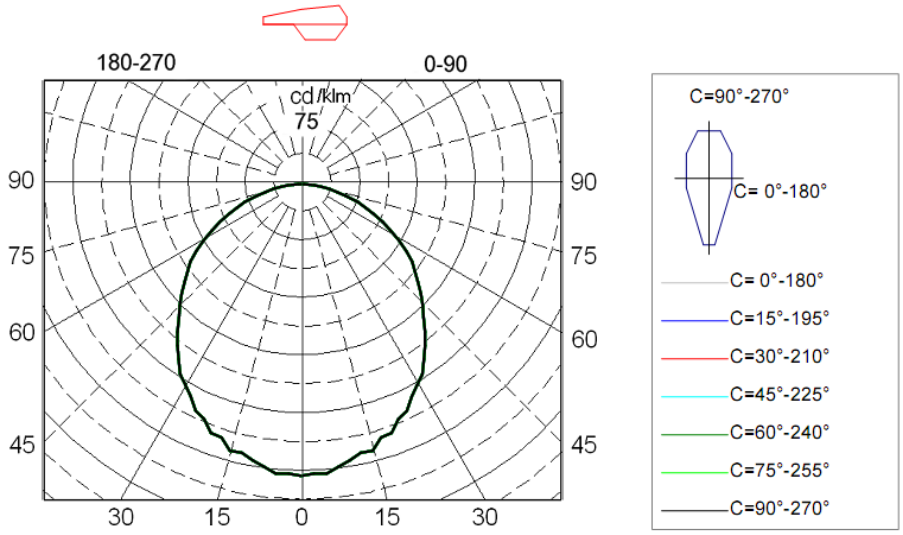

Luminaire light distribution of polar coordinates in the conditional flux 1000lm

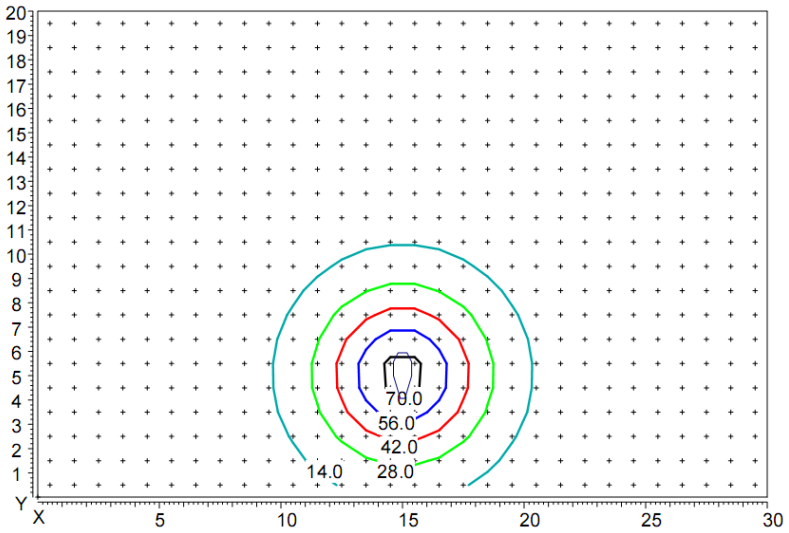

Distribution of illumination in height hanging lamp 5 м

Coordinates of the luminaire X=15m, Y=5m.

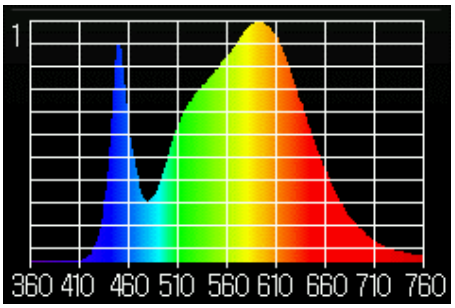

Spectrum of ligh 5000K