LUMILEDS

CE

LED HIGH BAY INDUSTRIAL FIXTURE / HBUBD 10 280x280x130mm 100W

CODE: HB100UBDXX ('XX' stand for CCT option 50=5000K)

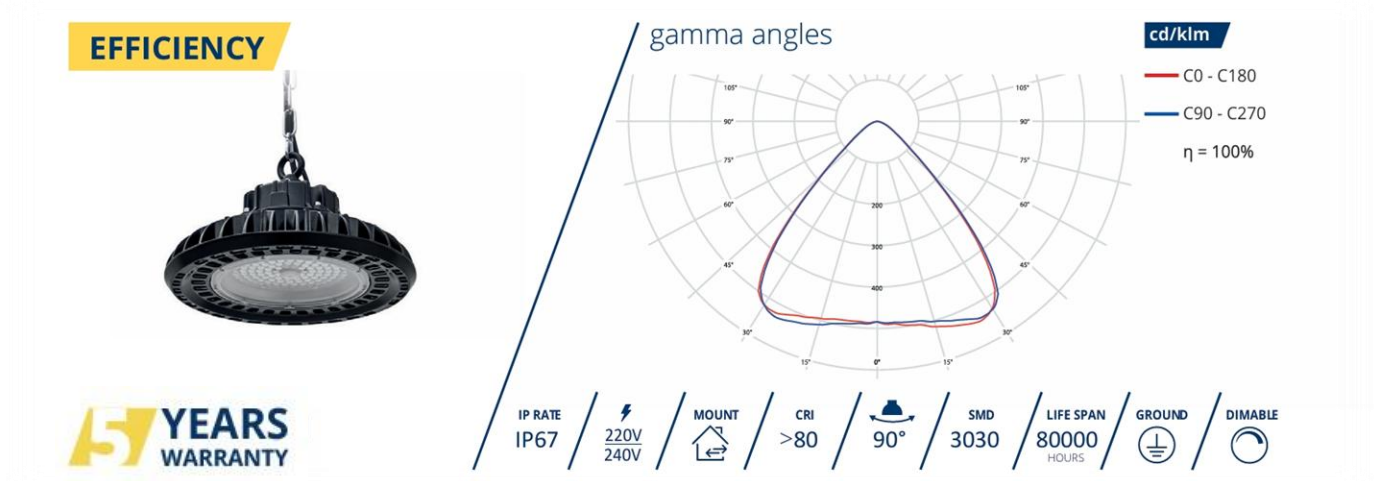

Electrical Specification

Size	Light Source	Driver	Voltage	Power	CCT	IP Level	Lumens	CRI
280x280x 130mm	3030	Sosen	220-240V	100W	3000K/4000K/ 5000K/6500K	IP67	16 700lm	CRI >80

Diffuser	Angle	Tc=C°	Certificates	Application	PF	Directive	Lifespan	Warranty
PC Lense	90°	-20°/+45°	ROHS / CE	OUTDOOR/ INDOOR	PF>0.95	LVD	80.000h	5 years

Accessory: ADJ-100

Driver
CE and RoHS
Efficiency>90%
Dimmable
Harmonic Filter
50 000h

LED Chip
CE and RoHS
3030 SMD
EPISTAR
Gold Wire
50 000h



Test Reports

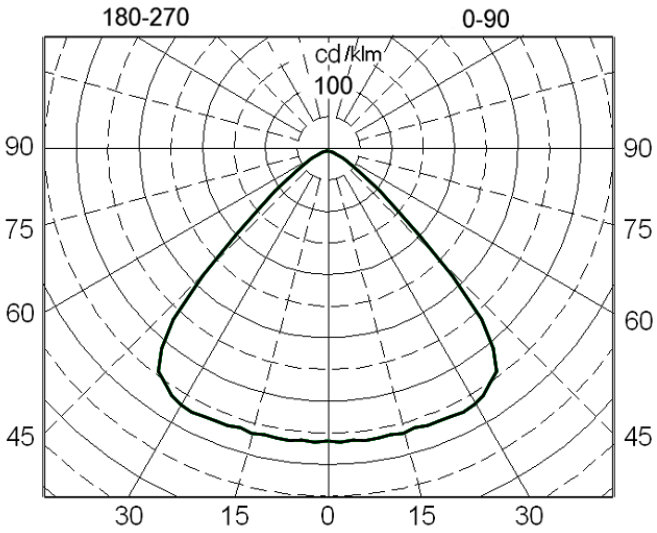

Luminaire light distribution of polar coordinates in the conditional flux 1000lm

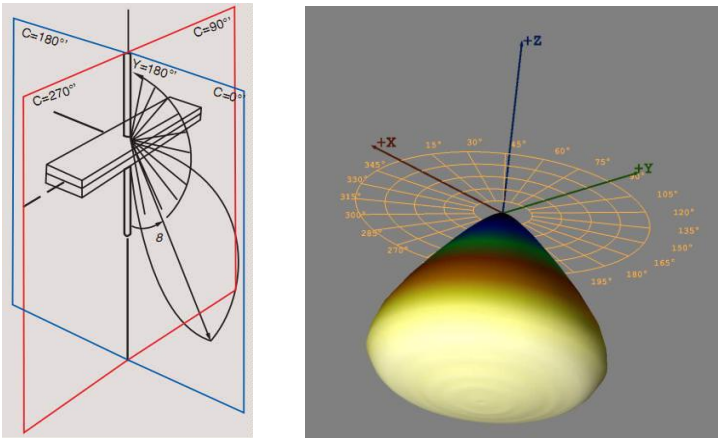

Luminaire light distribution of the 3D

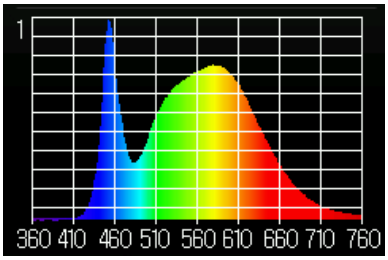

Spectrum of ligh 5000K