

EPISTAR

OSRAM

CE


LED PANEL LIGHT FIXTURE / LP12030S 1200x300x70mm 36W

CODE: LP1203036SXX ('XX' stand for CCT option 50=5000K)

FLICKERLESS


6 YEARS
WARRANTY

gamma angles

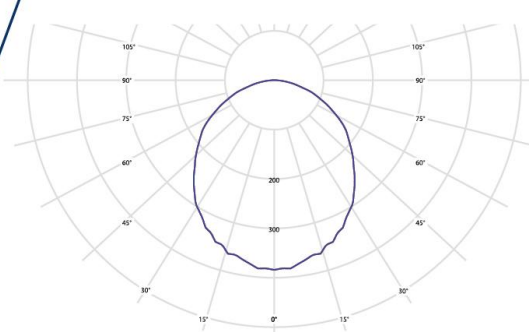

cd/klm

C0 - C180

C90 - C270

 $\eta = 100\%$ IP RATE
IP20220V
240VMOUNT
↑CRI
>80

120°

SMD
5730LIFE SPAN
50000
HOURSGROUND
⏚Electrical Specification

Size	Light Source	Driver	Voltage	Power	CCT	IP Level	Lumens	CRI
1200x300 x70mm	5730	Osram	220-240V	36W	3000K/4000K/ 5000K/6500K	IP20	4 536lm	CRI >80

Diffuser	Angle	Tc=°C	Certificates	Application	PF	Directive	Lifespan	Warranty
PS/Opal	120°	-20°/+45°	ROHS / CE	INDOOR	PF>0.95	LVD	50.000h	6 years


**DRIVER**

- Suitable for CE and ROHS Criterias
- High Efficiency >90
- Harmonic Filter
- Lasts for 50.000 Hr


**CABLE**

- 0,80mm Thickness
- Electrolytic Solid Copper
- TI/PVC Isolation

Test Reports

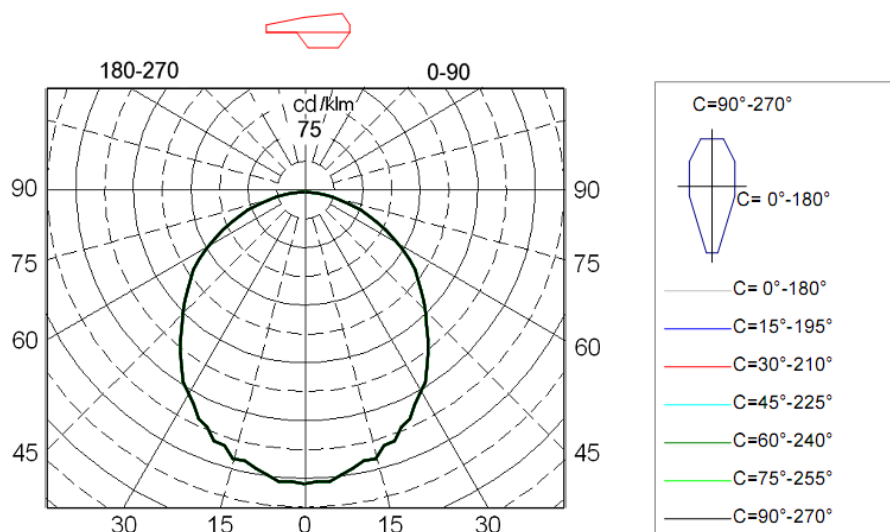


Luminaire light distribution of polar coordinates in the conditional flux 1000lm

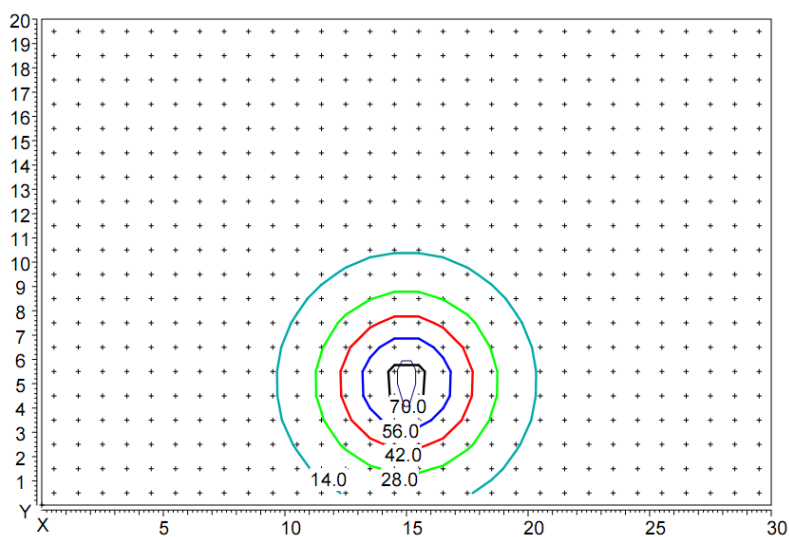

Distribution of illumination in height hanging lamp 5 m

Coordinates of the luminaire X=15m, Y=5m.

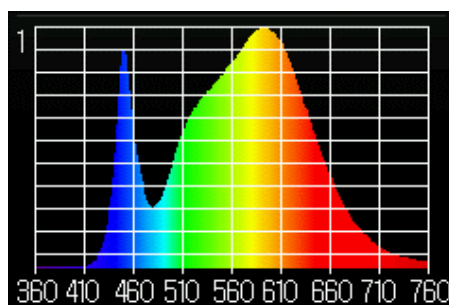

Spectrum of light 5000K