

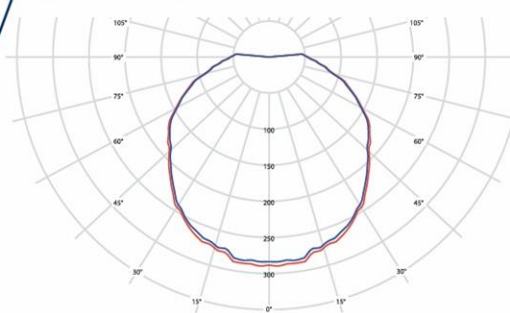
EPISTAR
OSRAM
CE
LED TRIPROOF INDUSTRIAL FIXTURE / LITE 120 1200mm 36W

CODE: 651236DZEMXX ('XX' stand for CCT option 50=5000K)

WATERPROOF

5 YEARS WARRANTY

gamma angles


cd/klm

C0 - C180

C90 - C270

 $\eta = 100\%$

IP RATE **IP65** / **220V/240V** / MOUNT / CRI **>80** / **120°** / SMD **5730** / LIFE SPAN **80000** HOURS / GROUND

Electrical Specification

Size	Light Source	Driver	Voltage	Power	CCT	IP Level	Lumens	CRI
1200mm	5730	Osram	220-240V	36W	3000K/4000K/ 5000K/6500K	IP65	5 328lm	CRI >80

Diffuser	Angle	Tc=C°	Certificates	Application	PF	Emergency Power	Lifespan	Warranty
PC/Opal	120°	-20°/+45°	ROHS / CE	OUTDOOR/ INDOOR	PF>0.95	3h 5W	80.000h	2y. for emergency unit 5y. for luminaire


METAL SHEET

- DKP Metal Sheet
- White Paint
- 0,40 mm Thickness


CABLE GLAND

- Raw material : Polyamide
- Protection class: IP 65
- Heat Resistance : - 30 °C + 80 °C


CEILING CARRIER

- Stainless Steel
- Easy and practical installation with biasing Feature
- 0,60 mm Thickness


MANDAL

- Stainless Steel
- Easy and practical installation with biasing Feature
- 0,50 mm Thickness

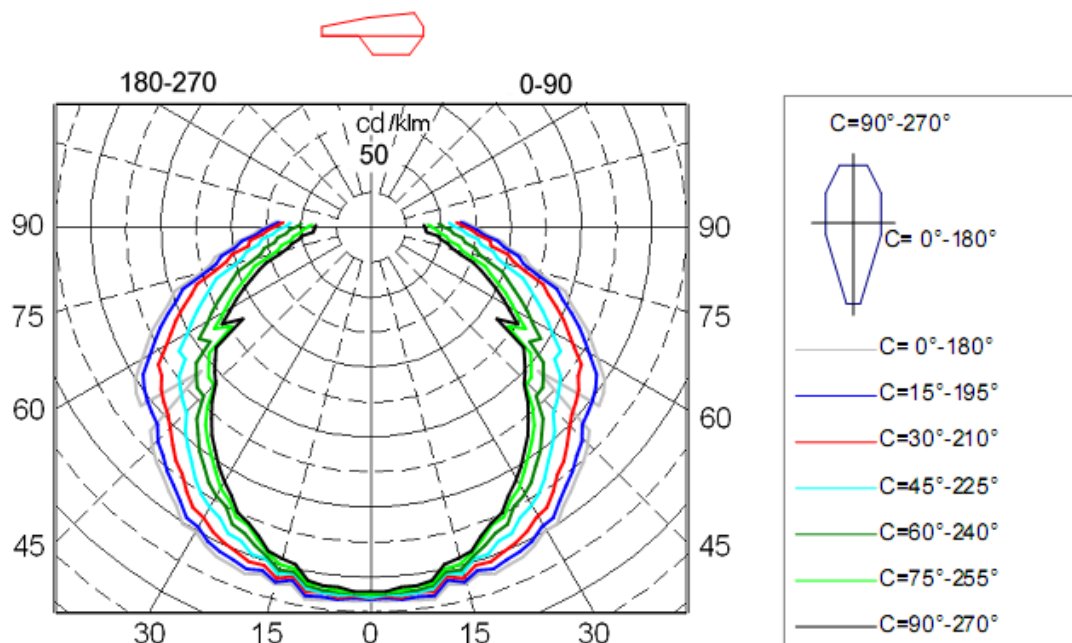

DRIVER

- Suitable for CE and ROHS Criterias
- High Efficiency >%90
- Harmonic Filter
- Lasts for 50.000 Hr

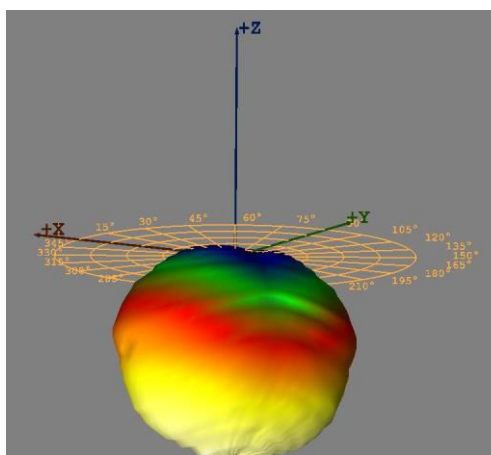
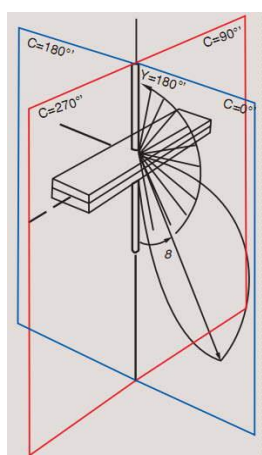

CABLE

- 0,80mm Thickness
- Electrolytic Solid Copper
- TI/PVC Isolation

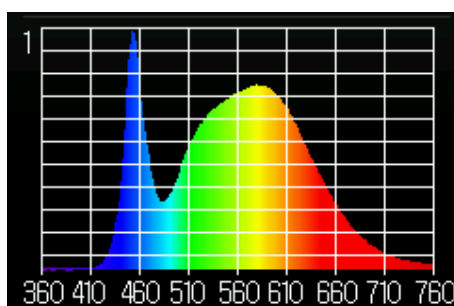
Test Reports



Luminaire light distribution of polar coordinates in the conditional flux 1000lm



Luminaire light distribution of the 3D



Spectrum of light 5000K